


Injection Systems

Total Process Control

- » Temperature
- » Pressure
- » Flow Rate

FloWare® Control Software

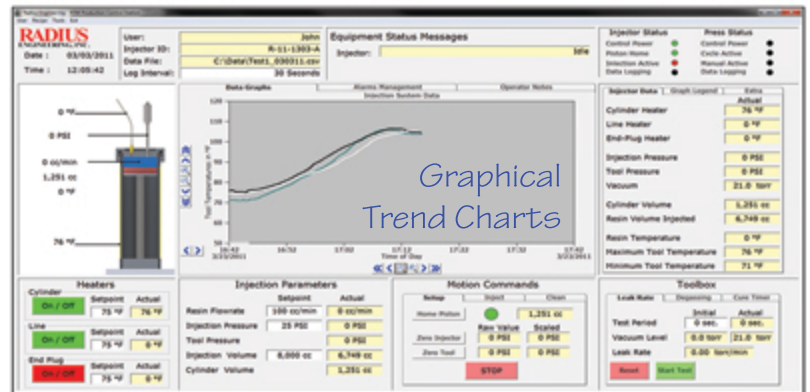

10,000 cc



Standard Models

2,100 cc



5,000 cc



Injector Features	2,100 cc	5,000 cc	10,000 cc
Maximum resin pressure	400 psi (27.5 bar)	300 psi (21 bar)	160 psi (11 bar)
Maximum resin flow rate	500 cc/minute	750 cc/minute	1000 cc/minute
Heated resin cylinder / max. temp.	✓ 350 °F (180 °C)	✓ 350 °F (180 °C)	✓ 350 °F (180 °C)
Positive-displacement stepper motor	✓	✓	✓
Eight tool temperature TC inputs	✓	✓	✓
Full process data logging	✓	✓	✓
High vacuum degassing to < 0.2 Torr	Optional	Optional	Optional
Heated end plug / max. 350 °F (180 °C)	Optional	Optional	Optional
Heated injection line / max. 350 °F	Optional	Optional	Optional